
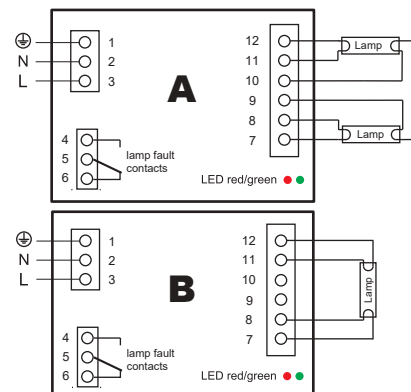


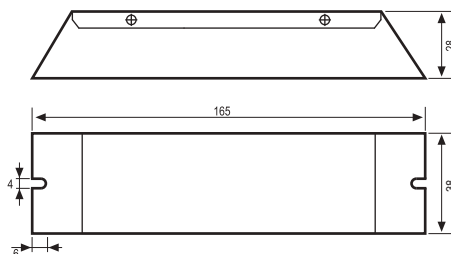

Part Number: 820021001

EPS2X21W/425mA

Technical Data

Lamp power:	10~40W
Wiring diagram A	
Lamp type:	GPH150~357T5L TUV16W, TUV20W
Wiring diagram B	
Lamp type:	GPH436~843T5L TUV36W
Lamp current:	0.38~0.43A
Mains voltage:	110~240VAC 50/60Hz
Efficiency:	>90%
Operating frequency:	25~60KHz
Power factor:	>0.9 typ.
Ambient temperature:	0~40°C
Tc-temperature:	Max. 70°C
Dimensions:	165X38X28mm
Weight:	0.15Kg

Features

- > electronic ballast for two-lamps operation
- > to be used with four-wire lamps
- > Preheat start
- > status forwarding
 - potential free relay contacts for lamp on / lamp fault
 - relay activated: lamp on
- > relay contacts:
 - potential free, load: 50~500mA at 24~277V AC
 - 50~500mA at 5~30V DC

Mounting Restrictions

Disconnect input power before installing or servicing
 Ballast case must be grounded
 Don't short any two wires of the input and output wires
 For indoor use only
 Max. Cable length between the ballast and lamp: 3.0m