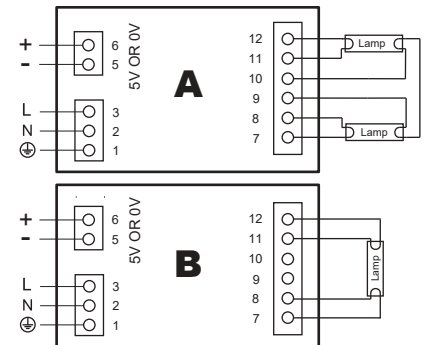
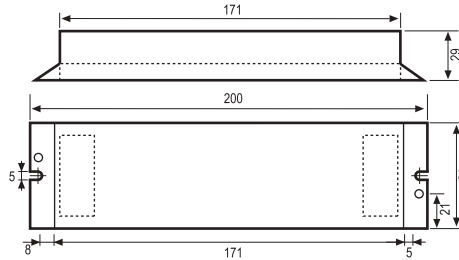



Part Number: 820075001

EPS2X75W/800mA(UL PH2-800-2/75U)

Technical Data

Lamp power:	21~155W
Wiring diagram A	
Lamp type:	GPH436~843T5LHO TUV36T5LHO
Wiring diagram B	
Lamp type:	GPH1148~1554T5LHO TUV48T5LHO, TUV64T5LHO
Lamp current:	0.75~0.85A
Mains voltage:	110~240VAC 50/60Hz
Efficiency:	>90%
Operating frequency:	25~60KHz
Power factor:	>0.9 typ.
Ambient temperature:	0~40°C
Tc-temperature:	Max. 70°C
Dimensions:	200X64X29mm
Weight:	0.45K
THD:	<15%

Features

- > electronic ballast for one-lamp or two-lamps operation
- > to be used with four-wire lamps
- > Preheat start
- > status indication via 5V DC signal output indicators
 - DC 5V: lamp on
 - DC 0V: lamp fault
- *connected LED

Mounting Restrictions

- Wire gauge: 0.5-1.5mm², strip length: 8mm
- Disconnect input power before installing or servicing
- Ballast case must be grounded
- Don't short any two wires of the input and output wires
- For indoor use only
- Max. Cable length between the ballast and lamp: 5.0m