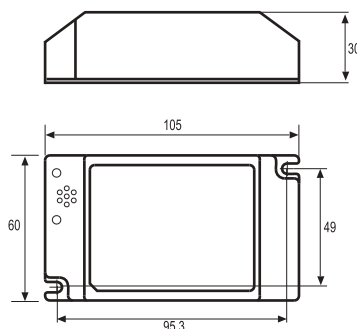

Part Number: 811040010

EPS40W/425mA/P

Technical Data

Lamp power:	10~40W
Lamp type:	GPH212~893T5L TUV16W, TUV20W, TUV36T5L, TUV36W
Lamp current:	0.38~0.43A
Mains voltage:	198~264VAC 50/60Hz
Efficiency:	>90%
Operating frequency:	25~60KHz
Power factor:	>0.9 typ.
Ambient temperature:	0~40°C
Tc-temperature:	Max. 70°C
Dimensions:	105X60X30mm
Weight:	0.30Kg

Optional Parts

-  01 Input wire: CE UL ...
-  02 Output wire: 4X20AWG 4X18AWG...
-  03 Lamp connector G10Q
-  04 Water joint PG9, PG13.5, M16X1.5
-  05 Dust cover

Features

- > electronic ballast for one-lamp operation
- > to be used with four-wire lamps
- > Preheat start
- > > status indication via LED indicators and Alarm
- green led: lamp on
- red led: lamp fault or no lamp

Mounting Restrictions

Disconnect input power before installing or servicing
 Don't short any two wires of the input and output wires
 For indoor use only
 Max. Cable length between the ballast and lamp: 3.0m

120V Version Part number: 8110400011