


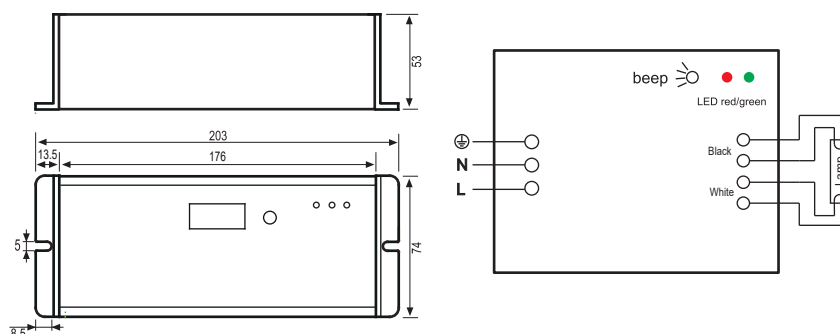

Part Number: 811100001

EPS100W/800mA/L

Technical Data

Lamp power:	40~100W
Lamp type:	GPH212~893T5LHO TUV36T5LHO, TUV75W
Lamp current:	0.80~0.90A
Mains voltage:	99~264VAC 50/60Hz
Efficiency:	>90%
Operating frequency:	40~60KHz
Power factor:	>0.9 typ.
Ambient temperature:	0~40°C
Tc-temperature:	Max. 70°C
Dimensions:	203X74X53mm
Weight:	0.56Kg

Optional Parts

-  01 Input wire: CE UL ...
-  02 Output wire: 4X20AWG 4X18AWG...
-  03 Lamp connector G10Q
-  04 Water joint PG9, PG13.5, M16X1.5
-  05 Dust cover

Features

- > electronic ballast for one-lamp operation
- > to be used with four-wire lamps
- > preheat start
- > status indication via LED indicators and Alarm
 - green led: lamp on
 - red led: lamp fault or no lamp
- > the ballast life and lamp life display(days) via Digital tube

Mounting Restrictions

Disconnect input power before installing or servicing
 Ballast case must be grounded
 Don't short any two wires of the input and output wires
 Max.Cable length between the ballast and lamp: 3.0m
 For indoor use only

3 free contact Version Part number: 811100020
EPS100W/800mA/N

