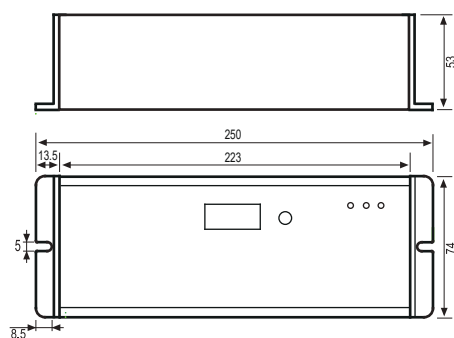


Part Number: 8112000001

EPS200W/1.8A/N

Technical Data

Lamp power: 100~200W
 Lamp type: GPHA843~1200T6L
 Lamp current: 1.70~1.90A

Mains voltage: 99~264VAC 50/60Hz
 Efficiency: >90%
 Operating frequency: 40~60KHz
 Power factor: >0.9 typ.
 Ambient temperature: 0~40°C
 Tc-temperature: Max. 70°C
 Dimensions: 250X74X53mm
 Weight: 0.95Kg

Optional Parts

-  01 Input wire: CE UL ...
-  02 Output wire: 4X20AWG 4X18AWG...
-  03 Lamp connector G10Q
-  04 Water joint PG9, PG13.5, M16X1.5
-  05 Dust cover

Features

- > electronic ballast for one-lamp operation
- > to be used with four-wire lamps
- > preheat start
- > status indication via LED indicators and Alarm
 - green led: lamp on
 - red led: lamp fault or no lamp
- > the ballast life and lamp life display(days) via Digital tube
- > status forwarding
 - potential free relay contacts for lamp on/lamp fault
 - replay activated: lamp on
 - potential free, load: 50~500mA at 24~277V AC or 5~30V DC

Mounting Restrictions

Disconnect input power before installing or servicing
 Ballast case must be grounded
 Don't short any two wires of the input and output wires
 Max.Cable length between the ballast and lamp: 3.0m
 For indoor use only

Lamp current 1.5A Version Part number

811200002 EPS200W/1.5A/N

Lamp current 2.1A Version Part number

811200003 EPS200W/2.1A/N